




Kiilto Sisänurkkavahvike



Pre-fabricated Kiilto Sisänurkkavahvike internal corner reinforcement to be used with Kiilto waterproofing.

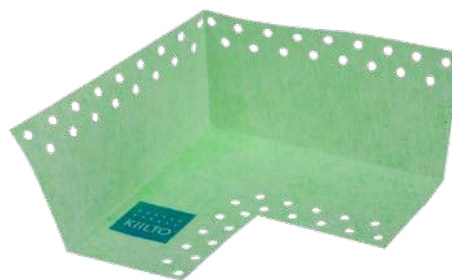

AREA OF APPLICATION

Pre-shaped, elastic corner reinforcement to be used with rollable waterproofing membranes.
To be used as part of the KeraSafe waterproofing system.

ADDITIONAL INFORMATION

The information given in this product data sheet is based on our tests and our practical knowledge. The technical data is defined in standard conditions. Variations in local working conditions and methods will affect the product performance and result. We guarantee the high quality of our products according to our Quality Management System. No liability can be accepted from incorrect use of the product or prevailing conditions, over which we have no control. Thus, we cannot be held responsible for the final result. The correct use of the product presupposes that the user has made him/herself aware of the contents of the working instructions and procedure guide, if provided.

ENVIRONMENT AND SAFETY

Avoid unnecessary skin contact and exposure with the fresh product, use safety gloves. Refer to material safety data sheet. For information on product and package disposal, visit www.kiilto.com.

| | |
|------------------------|--|
| LAYER THICKNESS | approx. 0.35 mm |
| TEMPERATURE RESISTANCE | -10 - 70 °C |
| TYPE/BINDER | PE foil (inner part) PP non-woven textile (exterior surfaces) |
| PACKAGE SIZES | 120 x 90 mm 20 pcs/package |
| STORAGE | In unopened containers, above +1 °C, for 2 year. |